


# RG-NBS5200-24GT4XS-P-V2

## 24-port Gigabit Layer 3 PoE Switch, 4 SFP+ Uplink

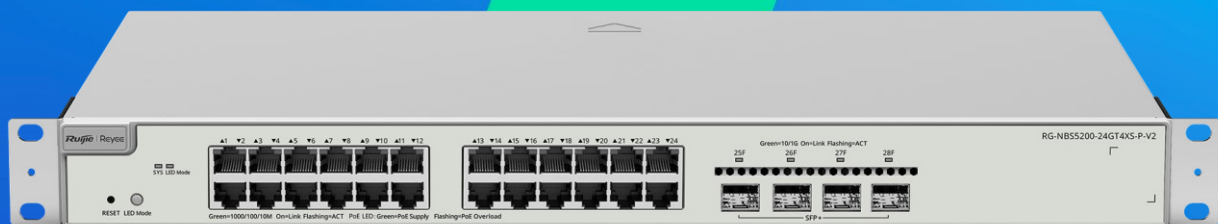

### Highlights

- 24-Port Gigabit Layer 3 Managed PoE Switch, 4 SFP+ Uplink
- Enterprise-Class Quality and Features, Delivering Exceptional Performance
- 6 kV Surge Protection, Reducing the Possibility of Port Damage
- Multiple Security Policies, Protecting Your Network
- Lifetime Management on Ruijie Cloud Anytime, Anywhere


### RG-NBS5200-24GT4XS-P-V2

24-Port Gigabit Layer 3 Cloud Managed PoE Switch, 4 x SFP+ Uplinks

24 x 10/100/1000M Auto Sensing Ports  
Support PoE/PoE+

4 x 10GE SFP+ Ports





Switching Capacity  
128 Gbps



Forwarding Rate  
96 Mpps




5 Years  
Warranty



PWM Fan  
Optimized for Low Noise

## Enterprise-Class Quality Ensures High Performance


Link Aggregation IGMP Snooping VLAN

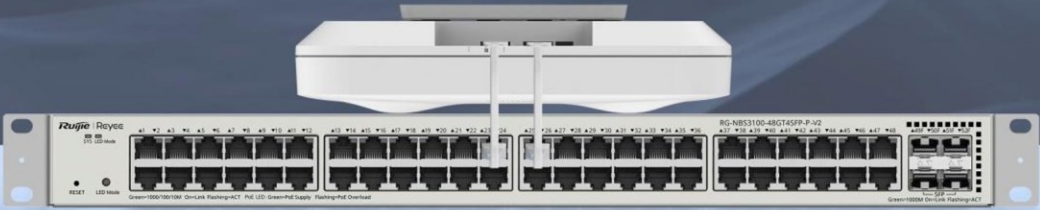

## Enterprise-Class Quality Ensures High Performance


Link Aggregation IGMP Snooping VLAN

**With IGMP**



## Enterprise-Class Quality Ensures High Performance

Link Aggregation IGMP Snooping VLAN

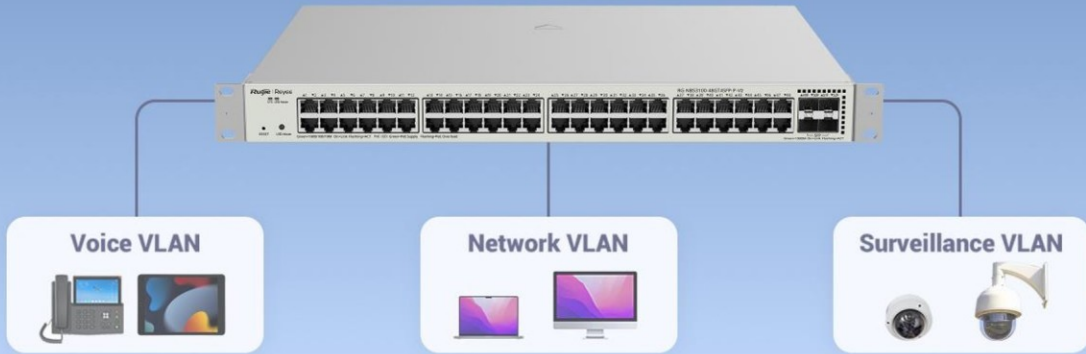

## Ruijie Cloud: Make Your Business Easy

- Support SON and zero-touch provisioning on Ruijie Cloud
- Monitor switch statistics at anytime, anywhere
- Configure VLANs on Ruijie Reye App
- Simplify maintenance to reduce onsite time and costs



## Product Information

<b>Model</b>	<b>RG-NBS5200-24GT4XS-P-V2</b>
<b>Product Category</b>	Layer 3

## Hardware Specifications

<b>Model</b>	<b>RG-NBS5200-24GT4XS-P-V2</b>
<b>Product Information</b>	
<b>Warranty</b>	5 years
<b>Port Specifications</b>	
<b>Total number of RJ45 ports</b>	24
<b>Total number of optical ports</b>	4
<b>Number of 1GE combo ports</b>	No
<b>Number of 1GE SFP ports</b>	No
<b>Number of 10GE SFP+ ports</b>	4
<b>Number of 10/100BASE-T ports</b>	No
<b>Number of 10/100/1000BASE-T ports</b>	24
<b>Number of 10/100/1000/2500BASE-T ports</b>	No
<b>Number of 100/1000/2.5G/5G/10GBASE-T ports</b>	No
<b>Module slots</b>	No
<b>Reset button</b>	1
<b>DIP switch</b>	No
<b>Power Supply and Consumption</b>	
<b>PoE Out standard</b>	PoE/PoE+ (IEEE 802.3af/at)
<b>Number of PoE Out ports</b>	24
<b>Number of PoE/PoE+ Out ports</b>	24

# Hardware Specifications

Model	RG-NBS5200-24GT4XS-P-V2
Number of PoE/PoE+/PoE++ Out ports	No
PoE budget	370 W
PoE power pins	1-2 (+), 3-6 (-)
Power input	220 V AC power supply: <ul style="list-style-type: none"> <li>• Rated input voltage: 100 V AC to 240 V AC, 50/60 Hz</li> <li>• Maximum input voltage: 90 V AC to 264 V AC, 47 Hz to 63 Hz</li> <li>• Maximum input current: 6 A</li> </ul>
Maximum power consumption	30 W (with no PoE load) 430 W (with full PoE load)
Power output	No
Power supply	Fixed power supply
<b>System Specifications</b>	
RAM	512 MB
Flash memory	256 MB
Forwarding rate	96 Mpps
Switching capacity	128 Gbps(bit/s)
<b>Dimensions and Weight</b>	
Casing	Metal
Product dimensions (W x D x H)	440 mm x 222.6 mm x 44 mm (17.32 in. x 8.76 in. x 1.73 in.)
Weight	2.88 kg (6.35 lbs) (without packaging materials)
Shipping weight	4.00 kg (8.82 lbs)
<b>Environment and Reliability</b>	
Hot swapping of fan modules	No
Fan	2 x fixed fans
Cooling	Air cooling, left-to-right airflow
Acoustic noise	23°C(73.4°F): 32 dB (with half PoE load) 50°C(122°F): 49 dB (with full PoE load)

# / Hardware Specifications

Model	RG-NBS5200-24GT4XS-P-V2
Mounting options	Rack
Hot swapping of cables	Service ports support hot swapping of cables.
MTBF	400,000 hours
Operating temperature	0°C to +50°C (32°F to 122°F)
Storage temperature	-40°C to +70°C (-40°F to +158°F)
Operating humidity	10% RH to 90% RH (non-condensing)
Storage humidity	5% RH to 95% RH (non-condensing)
Altitude	Operating altitude: 0 m to +5,000 m (0 ft. to +16,404.20 ft.) Storage altitude: 0 m to +5,000 m (0 ft. to +16,404.20 ft.)
Corrosion class	No
ESD protection	Contact discharge: 6 kV Air discharge: 8 kV
Surge protection	Service port: ±6 kV for common mode Power connector: ±6 kV for both common mode and differential mode
<b>Certification and Regulatory Compliance</b>	
EMC	EN 55032 EN 61000-3-2 EN 61000-3-3 EN 55035 EN 300 386
Safety compliance	IEC 62368-1
Certification	CE

# Software Specifications

Model	RG-NBS5200-24GT4XS-P-V2
<b>Authentication</b>	
RADIUS	Yes
802.1X authentication	Yes
Port-based 802.1X authentication	Yes
MAC address-based 802.1X authentication	Yes
Guest VLAN	Yes
<b>Basic Configurations</b>	
PoE watchdog	Yes
Online upgrade	Yes
<b>Ethernet Switching</b>	
Maximum number of VLANs	4094
Maximum number of MAC address entries	16000
Interface flow control	Yes
MAC address-based VLAN	No
IP subnet - based VLAN assignment	No
IEEE 802.1Q VLAN	Yes
Basic QinQ	No
VLAN configuration supported on LAN ports	Yes
Voice VLAN	Yes
STP (IEEE 802.1d)	Yes
RSTP (IEEE 802.1w)	Yes
MSTP (IEEE 802.1s)	Yes
LLDP	Yes

# Software Specifications

Model	RG-NBS5200-24GT4XS-P-V2
LLDP-MED	Yes
Static MAC address	Yes
MAC address filtering	Yes
Static aggregation	Yes
LACP	Yes
Inbound or outbound rate limiting based on interface traffic	Yes
<b>Gateway Features</b>	
802.1p priority-based traffic classification	Yes
DSCP priority-based traffic classification	Yes
Egress queues based on 802.1p and DSCP priorities	Yes
SP	Yes
WRR	Yes
SP+WRR	Yes
Global QoS	Yes
<b>Interface</b>	
Jumbo frame length (MTU)	9216 bytes (interface configuration mode)
EEE	Yes
Cable test	Yes
<b>IP Routing</b>	
Maximum number of IPv4 static routes	500
IPv6 routing table size (network route)	128
Maximum number of IPv6 static routes	128

# Software Specifications

Model	RG-NBS5200-24GT4XS-P-V2
IPv4 static route	Yes
IPv6 static route	Yes
OSPFv2	Yes
OSPFv3	Yes
IP Service	
Maximum number of ARP entries	2000
IPv4 routing table size (host route)	6000
ARP	Yes
IPv4 ping	Yes
IPv4 traceroute	Yes
IPv6	Yes
ICMPv6	Yes
IPv6 ping	Yes
IPv6 traceroute	Yes
DNS client	Yes
DNSv6 client	Yes
DHCP relay	Yes
DHCP server	Yes
DHCP client	Yes
Multicast	
IGMPv1 snooping	Yes
IGMPv2 snooping	Yes
Basic IGMPv3 snooping	Yes
Full IGMPv3 snooping	Yes

# Software Specifications

Model	RG-NBS5200-24GT4XS-P-V2
IGMP filtering	Yes
IGMPv1, v2, and v3	Yes
<b>Network Management and Monitoring</b>	
Fan speed adjustment	Intelligent speed adjustment
Port mirroring	Yes
Mirroring	Yes
HTTP login	Yes
HTTPS login	Yes
RLOG	Yes
SON	Yes
Syslog	Yes
Client auto-discovery	Yes
PoE service failure	Yes
PoE power overload	Yes
SSH	No
Camera detection	Yes
Loop alarm	Yes
MAC address entries	Yes
IP address pool conflicts	Yes
Full ARP table	Yes
eWeb management	Yes
Ruijie Cloud management	Yes
Ruijie Reyee App management	Yes
SNMPv1, v2c, and v3	Yes

# Software Specifications

Model	RG-NBS5200-24GT4XS-P-V2
<b>Reliability</b>	
Number of VCS members	2
System dual backup	Yes
Enabling dual backup for the partition Uboot (based on a single flash memory)	Yes
Load balancing	No
ERPS	Yes:Stand-alone No:Hot standby
<b>Security</b>	
Maximum number of ACEs	Number of ACEs in the inbound direction of an interface: 1900 Number of ACEs in the outbound direction of an interface: 0
Port isolation	Yes
Broadcast storm control	Yes
Multicast storm control	Yes
Unknown unicast storm control	Yes
DHCP snooping	Yes
Standard ACL	Yes
Extended MAC ACL	Yes
Extended IP ACL	Yes
IPv6 ACL	Yes
IP-MAC-port binding	Yes
ARP anti-spoofing	Yes
IP source guard	Yes
CPU Protection Policy	Yes
<b>System Performance Capacity</b>	
Recommended camera limit	200 W H265: 350 400 W H265: 170



## Package Contents

Model	RG-NBS5200-24GT4XS-P-V2
<b>Device</b>	
Device	1
<b>Accessories</b>	
Rubber pad	4
Power cord retention clip	1
Screw	6 M4 x 8 mm cross recessed countersunk head screws
Grounding cable	1 x 1 m (3.28 ft.)
Power cord	1 x 1.5 m (4.92 ft.)
Rack-mount bracket	2
<b>Manual</b>	
User Manual	1
Warranty Card	1

*Ruijie* | ReYee

 Redefine your easy network



**Ruijie Networks Co., Ltd.**

Official Website: <https://Reyee.Ruijie.com>