

# DHI-IVSS7116DR

256CH 3U Intelligent Video Surveillance Server



WizMind

Launched by Dahua Technology, Dahua WizMind is a full portfolio of solutions composed of project-oriented products including IPC, IVSS, NVR, PTZ, XVR, Thermal and software platform which adopts industry-leading deep learning algorithms. Focusing on customer's requirements, WizMind provides precise, reliable and comprehensive AI solutions for verticals.

## Series Overview

Dahua IVSS goes beyond ordinary NVR products. It is an Intelligent Video Surveillance Server that combines video management features with traditional video storage functions in one device. Aside from the basic functions of a network video recorder, IVSS also has a variety of powerful AI features, such as face recognition, video metadata and industrial algorithms to meet the needs of different scenes.

## Functions

### Face Recognition (with AI Camera)

Real-time Face Detection & Recognition with AI cameras, with results for real-time face detection and recognition being displayed on the AI camera. Faces are recorded through the use of video metadata, and facial features are filtered during real-time display, focusing on only displaying faces with target features. Facial features include gender, age, expression, and more. The linkage actions for face detection and recognition events are customizable, including alarm, buzzer, snapshot, video recording, and more.

- 64-bit High-performance multi-core processor
- 256-channel IP video access
- Max 1280/1280/1280 Mbps incoming/recording/outgoing bandwidth
- 16 bays, supports RAID 0/1/5/6/10/50/60
- 4 HDMI/1 VGA video output



### AI IVS (with AI Camera)

With deep learning algorithms, AI IVS technology can recognize humans and vehicles accurately. In restricted areas (such as pedestrian and vehicle areas), there is a great reduction in the generation of false alarms of intelligent detection based on target type (such as tripwire, intrusion, parking detection, loitering detection, crowd gathering estimation and more).

### Video Metadata (with AI Camera)

Video Metadata is attribute information extracted from a target for data retrieval. Currently, there are 4 main kinds of metadata in the security industry: Human face, human body, motor vehicle and non-motor vehicle metadata.

### ANPR

Automatic Number Plate Recognition is available for convenient entrance and exit management. This feature provides license plate recognition (working with Dahua ITC cameras), license plate comparison with blocklist and allowlist, vehicle database management, and vehicle records search.

### N+M Hot Standby

The highly reliable redundancy N+M Hot Standby design provides a secure, failover technique, ensuring immediate backup. In the event of a system failure, the sub server instantly takes over the main server to ensure no data is lost.

### Smart Tracking

The automatic tracking PTZ feature automatically tracks moving targets in the field of view of the camera. This function is ideal for following objects as they move through airports, parking lots, city centers, and other scenes.

## Technical Specification

### System

Main Processor	64-bit multi-core processor
Operating System	Embedded Linux OS
Operating Interface	Web (PCAPP), local GUI

### AI Applications

AI by Camera	Face detection; face recognition; video metadata (human; vehicle; non-motor vehicle); IVS; license plate comparison; tripwire people counting; regional people counting; abnormal number of people in queue; smoking detection; call detection; face & body detection; SMD
--------------	--

### Face Detection

Face Detection	1. AI by Camera: Supports 160-channel 2 MP or 80-channel 4 MP resolution with face detection IP camera; 2. Supports 6 properties: Gender, age, glasses, expression, face mask, and beard
----------------	---

### Face Recognition

Face Database Capacity	1. 50 human face databases with 500,000 face pictures in total 2. 5 passerby databases with 500,000 face pictures in total The human face database and the passerby database share the total capacity and number of face images.
Face Recognition	1. AI by Camera: 160-channel 2 MP or 80-channel 4 MP face recognition with face recognition IPC; 2. Supports entries frequency alarm

### Vehicle License Plate Comparison

License Plate Database Capacity	1. 50 plate databases with 500,000 plate numbers in total 2. Supports allowlist and blocklist
Vehicle License Plate Comparison	Supports 80-channel 2 MP or 60-channel 4 MP resolution with ITC

### Video Metadata

Video Metadata	1. AI by Camera: Supports 160-channel 2 MP or 80-channel 4 MP resolution 2. Object type: Human body: Gender, age, sleeves length, top color, bottom type, bottom color, bag, rain coat, umbrella, hat, hairstyle, direction, hold a baby, face mask Vehicle: Plate No, vehicle type, vehicle color, plate color, logo, calling, seatbelt, ornament Non-motorized Vehicle: Non-motor vehicle type, non-motor vehicle color, number of passengers, umbrella, rain coat, bag, sleeve, length, top color, hat, hair style, face mask
----------------	--

### IVS Analytics

IVS	1. AI by camera: Supports 160-channel 2 MP or 80-channel 4 MP resolution 2. Rules: AI by Camera: tripwire, intrusion, abandoned object, missing object, fast moving, crowd gathering, loitering, parking, and fence-crossing
-----	---

### Video Diagnosis

Video Diagnosis	1. Supports 1-channel tour detection 2. Supports 13 detection items: blurry video, low contrast, video tampering, video jitter, abrupt image change, image freeze, overexposure detection, video
-----------------	---

Video Diagnosis	loss, noise detection, scene changing, static noise, interference fringe and color cast
-----------------	---

### Cluster

Cluster	N+M
---------	-----

### Audio and Video

Access Channel	256-channel
Network Bandwidth	Incoming bandwidth: 1280 Mbps; Recording bandwidth: 1280 Mbps; Outgoing bandwidth: 1280 Mbps
Resolution	32 MP; 24 MP; 16 MP; 12 MP; 8 MP; 6 MP; 5 MP; 4 MP; 3 MP; 1080p; 720p
Decoding Capability	2-channel 32 MP@30 fps; 2-channel 24 MP@30 fps; 3-channel 24 MP@24 fps; 4-channel 16 MP@25 fps; 8-channel 12 MP@20 fps; 8-channel 8 MP@30 fps; 16-channel 8 MP@15 fps; 11-channel 6 MP@30 fps; 13-channel 5 MP@30 fps; 15-channel 5 MP@25 fps; 16-channel 4 MP@30 fps; 24-channel 4 MP@20 fps; 21-channel; 3 MP@30 fps; 25-channel 3 MP@25 fps; 15-channel 1080p@60 fps; 32-channel 1080p@30 fps; 71-channel. 720p@30 fps
Video Output	1-channel VGA output, 4-channel HDMI output, VGA 1/HDMI 1 outputs the same video source.
Multi-screen Display	1st Screen: Max.64-channel; 2nd Screen: Max.36-channel; 3rd Screen: Max.1-channel; 4th Screen: Max.1-channel
Third-party Camera Access	Onvif, RTSP, Sony, Panasonic, Axis, Arecont, Pelco, Canon, Samsung

### Compression Standard

Video Compression	Smart H.265+; H.265; Smart H.264+; H.264
Audio Compression	G.711a; G.711u; PCM; G.726

### Network

Network Protocol	HTTP; HTTPS; TCP/IP; IPv4; RTSP; UDP; SMTP; NTP; DHCP; DNS; DDNS; P2P; iSCSI; IPv6; UPnP; SNMP
Mobile Phone Access	DMSS
Interoperability	ONVIF (Profile S, T and G); CGI; SDK
Browser	Chrome; PCAPP; IE9 or higher; Firefox
Network Mode	Multiple-address mode; Load balance; Fault-tolerance; Link aggregation

### Recording Playback

Multi-channel Playback	Max. 16-channel playback
Record Mode	Search video detection; IO alarm; thermal imaging; intelligent event; all record file
Storage Method	Internal HDD
Backup Method	HDD, peripheral USB storage device
Playback Function	1. Play; Pause; Stop; Fast forward; Fast backward; Reverse play; Frame by frame; 2. Full-screen; Backup (clip and file); Snapshot; Digital zoom; Audio on and off

### Storage

Disk Group	Yes
------------	-----

Network Disk	iSCSI
RAID	RAID0;RAID1;RAID5;RAID6;RAID10;RAID50;RAID60
Record Management	Supports record control (continuous, event-based, scheduled, scheduled & event-based).
<b>Alarm</b>	
General Alarm	Motion detection; tampering; local alarm; IPC external alarm; fire alarm; temperature alarm; temperature difference alarm; hot spot alarm; cold spot alarm
Anomaly Alarm	IPC offline alarm; storage error; HDD full; IP conflict; MAC conflict; login lock; AI module temperature alarm; AI module offline; fan malfunction; no HDD; power exception
Alarm Linkage	Record; snapshot (full image); alarm uploading; remote device alarm output; camera audio; buzzer; log; preset; email, and smart tracking. Disarming alarm linkage action by period or one-click sync disarm config with channels
<b>Port</b>	
Audio Input	1 channel
Audio Output	1 channel
Alarm Input	16 channels
Alarm Output	8 channels
Disk Interface	16 slots, SATA. Max.20 TB/HDD, hot swapping, CMR, support enterprise-grade HDD
eSATA	1 port
RS-232	1 port, for debug or COM data transmission
RS-485	1 port, control peripheral PTZ and so on. Supports various protocols.
USB	4 ports. 2 USB2.0 ports at the front panel and 2 USB3.0 ports at the rear panel.
HDMI	4 ports. HDMI 1 supports 4K output.
VGA	1 port
Network Port	4 RJ-45 ports 10/100/1000/2500Mbps self-adaptive Ethernet ports
Power	1+1 redundant power supply
Network Port Extension	4 RJ-45 ports 10/100/1000/2500Mbps self-adaptive Ethernet ports; 2 × 10-GbE optical fiber ports (optional)
<b>General</b>	
Disk Bay	16
Form Factor	3U
Power Supply	100–127/200–240 VAC, 50/60 Hz, 5/2.5 A (× 2)
Power Consumption	Working(all HDDs connected): ≤ 250 W (853 BTU/hr) Working(without HDD): ≤ 150 W (512 BTU/hr) Rated: ≤ 550 W (1877 BTU/hr)
Fan	Intelligent speed regulation fan
Net Weight	20.05 kg (44.20 lb)
Gross Weight	33.01 kg (72.77 lb)

Product Dimensions	Chassis: 444.8 mm × 539.4 mm × 133.2 mm (17.51" × 21.24" × 5.24") (W × D × H) Max. size: 485 mm (with hanger) × 539.4 mm × 133.2 mm (19.09" × 21.24" × 5.24") (W × D × H)
Packaging Dimensions	With packaging: 689 mm × 779 mm × 464 mm (27.13" × 30.67" × 18.27") (W × D × H)
Operating Temperature	0 °C to +45 °C (+32 °F to +113 °F)
Operating Humidity	10%–90% (RH), non-condensing
Operating Altitude	5,000 m (16,404.20 ft)
Installation	Desktop; Rack
Certifications	CE-LVD : EN 62368-1 CE-EMC : EN IEC 61000-3-2 , EN 61000-3-3 , EN 55032 , EN 50130-4 , EN 55035

### Ordering Information

Type	Model	Description
Intelligent Video Surveillance Server	DHI-IVSS7116DR	256CH 3U Intelligent Video Surveillance Server
Accessories (Optional)	IVSS7116/7124_AIModule_e_8_8	OCH Nonstandard Intelligent Video Analysis Module
	IVSS7116/7124_AIModule_e_8_4	OCH Nonstandard Intelligent Video Analysis Module
	DHI-RailBracket60/L-Shaped	Dahua Server Cabinet Rail Bracket
	NIC-EVS71-10G	OCH Nonstandard Network Card Module

### Accessories

Optional:



IVSS7116/7124\_AIModule\_e\_8\_8  
OCH Nonstandard Intelligent Video Analysis Module



IVSS7116/7124\_AIModule\_e\_8\_4  
OCH Nonstandard Intelligent Video Analysis Module





DHI-RailBracket60/L-Shaped  
Dahua Server Cabinet Rail Bracket




NIC-EVS71-10G  
OCH Nonstandard Network Card Module

**Dimensions (mm[inch])**

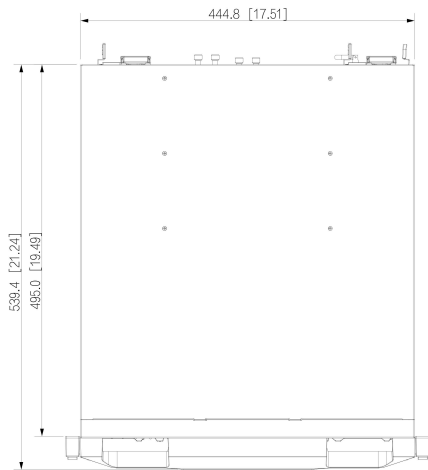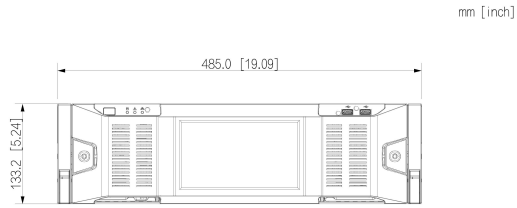

**Panels**

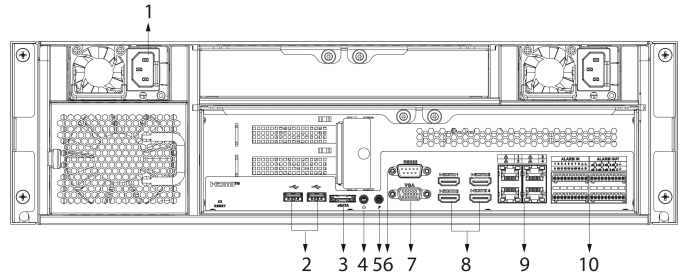

- |                 |                       |
|-----------------|-----------------------|
| 1 Power Input   | 2 USB Ports           |
| 3 eSATA Port    | 4 AUDIO OUT           |
| 5 AUDIO IN      | 6 RS-232 Port         |
| 7 VGA Ports     | 8 HDMI Ports          |
| 9 Network Ports | 10 Alarm In/Alarm Out |