

DHI-ITSTX-7301-A

GPS Tracker



Product Introduction

Supports 9-90V DC voltage, IP67 waterproof, adopts GPS+Beidou+LBS multiple positioning modes, with real-time tracking, ACC detection, fuel and power outage, vibration alarm, door opening and closing detection, SOS button, buzzer and other functions.

Application


Rental vehicles, credit vehicles, passenger vehicles, taxis, truck, motorcycle, etc...

Specification

Parameter	Description
Hardware Platform	EG915-LA+AT6558R (GPS+BD)
Communication Module	QUECTEL EG915-LA
Frequency Range	FDD: B2/B3/B4/B5/B7/B8/B28/B66 GSM: 850/900/1800MHz/1900MHz
Wireless Transmission	GPRS/CAT1
Recapture Takes Sensitivity	-160dBm
Tracking Sensitivity	-162dBm
Positioning Module	AT6558R
GPS Positioning Time	Hot start TTFF <2S (Open Sky)
	Recapture TTFF <1S
	Cold-start TTFF <32S (Open Sky)
Antenna	Shrapnel antenna

GPS Antenna	Built-in 25 * 25 * 4mm ceramic antenna
Power Light	red
GPS Light	blue
Network Light	green
SIM	Lift the cover
Backup Location Data	Article 999
Parameter Setting	SMS, platform
The GPRS Reporting Method	Once in 10 seconds
Work Pattern	Often connected
Third Party Inquiry	WEB/APP
Accelerated Sensor	support
Cut Off Oil And Power	support
ACC Detection	support
SOS Key	support
Door Detection	support
Car lock / unlock	support
Buzzer (5V)	support
Electronic Fence Function	support
Illegally cut the wire to alarm	support
Vehicle Vibration alarm	support
Anti-interference Detection	support
Access Protocol	808 (2019) protocol, with extension
Operating voltage range	DC 9V - 90V
Working Current	12V/45 mA
Dormant Current	12V/15 mA
Built-in Battery	300 mAh (3.7V Polymer cell)
Operating Temperature	-20℃ - 70℃
Storage Temperature	-20℃ - 70℃
Size	44.0mm×86.0mm×13.5mm
Protection	IP67

Size

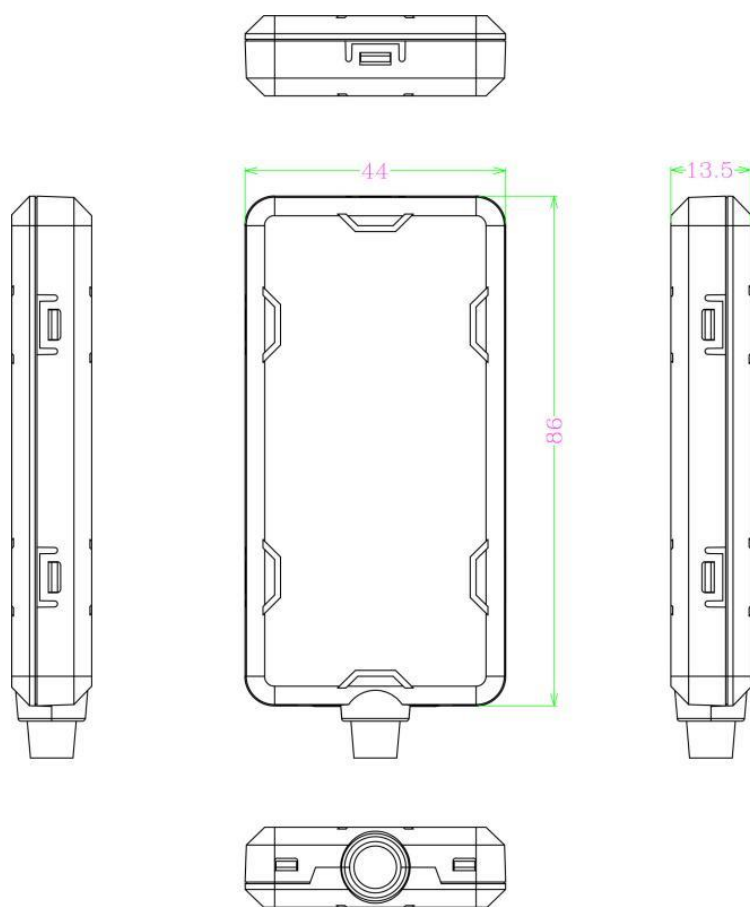

@2025 Dahua. All rights reserved. Design and specifications are subject to change without notice. Pictures in the document are for reference only, and the actual product shall prevail.