
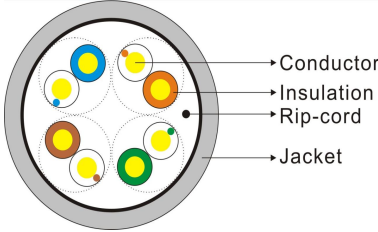




UTP cat.5e 4P Outdoor Data Sheet

ELECTRIC CHARACTERS (REF) ▪Voltage rating:30V ▪Temperature rating :-20-65°C ▪Dielectric strength: AC-500V/MIN ▪Insulation resistance:100M OHMS.KM MIN at 20°C Transmission Frequency: 100MHz	Physical Characters (REF) 1.Tensile strength before aging 1.1 Jacket: $\geq 13.5\text{MPa}$ 2.Elongating before aging 2.1 Jacket: $\geq 150\%$ Standard: TIA/EIA-568B
	

CONSTRUCTION ITEM

CONDUCTOR	CONSTRUCTION	AWG	1/0.48 ± 0.0048 *4Pairs
	MATERIAL	/	SOLID COPPER CLAD ALUMINUM
INSULATION	MATERIAL	/	HDPE
	OD	mm	0.90 \pm 0.03
	AVERAGE THICKNESS	mm	0.21
	COLOR	/	1P.WHITE&BROWN 2P.WHITE&BLUE 3P.WHITE&ORANGE 4P.WHITE&GREEN
JACKET	MATERIAL	/	PVC
	DIAMETER	mm	5.1 \pm 0.20
	AVERAGE THICKNESS	mm	0.55
	RIP CORD	/	YES
	COLOR	/	BLACK
	MARKING COLOR	/	OPTIONAL
MARKING	JACKET	/	OUTDOOR UTP CAT5E CABLE 4P/24AWG SOLID ****M