

DHI-EVS7124D-V2

24-bay Embedded Video Storage



- Standard dual controller for hardware redundancy.
- 64-bit High-performance multi-core processor.
- Max 512-ch IP camera inputs.
- Max 1024 Mbps incoming/recording/forwarding bandwidth.
- 24 bays, SAS/SATA, Hot-Swap.
- Supports RAID 0/1/5/6/10/50/60, JBOD, global and private hot standby.
- Supports video stream/ Picture direct storage mode and IPSAN storage mode.
- Supports Automatic Network Replenishment (ANR).
- SAS cascade for expanded storage space.
- Modular and drawer-like design.
- 1+1 redundant 80PLUS platinum power supply.

System Overview

EVS7 Series offers unparalleled storage technology. It is designed and developed to meet the needs of medium-range to high-end IP video surveillance applications.

Combined with hot-swap power supplies and hard disk drives, the EVS offers real Enterprise Class availability. This EVS is ideal for a wide range of applications such as public safety, transportation stations, government institutions, hotel resorts, shopping malls, city centers, and financial institutions, where demand expansion flexibility, high reliability and centralized storage management.

This EVS is compatible with numerous third-party devices making it the perfect solution for surveillance systems with or without a video management system (VMS). Its open architecture supports multi-user access and is compatible with ONVIF 2.4.

Functions

Modular Design

The hard disk and the main controller have a modular hardware design, and key modules such as the fan and power supply have a redundant design that improve the reliability of the overall hardware. The hard disk, fan, power supply and other modules are pluggable, and can be replaced for quick and easy maintenance.

RAID 0/1/5/6/10/50/60

Offering a balance between storage performance, storage capacity, and data integrity, the EVS features fruitful RAID 0/1/5/6/10/50/60 for faster and safer recording.

Dual-controller Hot Standby

A main controller and a standby controller (hardware redundancy) are embedded in the EVS. The standby controller is always active, and will automatically take over when the main controller behaves abnormally. In Active-Active mode, when the real-time transmission service of the standby-controller is enabled, the standby server pulls streams, protecting against video loss when the main-sub switch is in use.

Dual-controller Hot Standby

Automatic Network Replenishment (ANR)

Videos are recorded and saved to the SD card of cameras when the network breaks down. When the network recovers, the videos will be transferred to EVS and then recorded through it.

Technical Specification

System

Main Processor	64-bit high-performance multi-core processor
Operating System	Embedded Linux OS
Operating Interface	Web (PCAPP)
Controller	Dual controllers
Cache	16 GB by default (extendable to 64 GB)/controller

AI Applications

AI by Camera	Face detection, face recognition, IVS (abandoned object, missing object, loitering, crowd gathering, parking, fence-crossing, fast moving, tripwire and intrusion), video metadata (human, vehicle, non-motor vehicle), vehicle recognition, people counting (fisheye or people counting camera required), face & body detection, crowd distribution, smart thermal (call detection, visible channel- smoking detection, thermal channel-smoking detection)
--------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Camera Compatibility

Thermal	Works with camera for fire alarm, temperature alarm, temperature difference alarm, hot spot, cold spot, smoking and calling
People Counting	Works with camera for tripwire people counting, regional people counting and queue people counting
Bullet-PTZ Smart Track	Works with camera for manual tracking, auto tracking, click positioning and select positioning
Fisheye Dewarp	Supports dewarping for fisheye cameras

Audio and Video

Third-party Camera Access	Onvif, Onvifs, RTSP, Sony, Panasonic, Axis, Arecont, Pelco, Canon, Samsung, Hikvision
---------------------------	---------------------------------------------------------------------------------------

Compression Standard

Video Compression	Smart H.265+; H.265; Smart H.264+; H.264; MJPEG
Audio Compression	G.711A; G.711U; PCM; G726

Network

Network Protocol	HTTP; HTTPS; TCP/IP; IPv4; RTSP; UDP; SMTP; NTP; DHCP; DNS; DDNS; iSCSI; FTP ; SMB ; NFS
Interoperability	ONVIF (Profile S); CGI; SDK
Browser	Chrome; PCAPP; IE9 or higher; Firefox
Network Mode	NIC binding mode such as multiple-address mode, load balance, fault-tolerance, link aggregation, etc

Recording Playback

Multi-channel Playback	Web palyback, max. 16-channel playback
Record Mode	Auto record; manual record; search video detection; IO alarm; thermal imaging; intelligent event; all record file
Storage	Internal HDD and network disk
Backup	HDD, peripheral USB storage device
Playback Function	1. Play, pause, stop, fast forward, fast backward, reverse play, frame by frame 2. Full-screen, backup (clip; file), snapshot, digital zoom, audio on; off

Storage

Video Direct Storage (Private Protocol)	Incoming: 512-channel (bandwidth: 1024 Mbps) Recording: 512-channel (bandwidth: 1024 Mbps) Outgoing: 512-channel (bandwidth: 1024 Mbps) Playback: 32-channel (bandwidth: 64 Mbps)
Video Direct Storage (Onvif)	Incoming: 512-channel (bandwidth: 1024 Mbps) Recording: 512-channel (bandwidth: 1024 Mbps) Outgoing: 512-channel (bandwidth: 1024 Mbps) Playback: 32-channel (bandwidth: 64 Mbps)
Video Direct Storage (Auto Register)	Incoming: 512-channel (bandwidth: 1024 Mbps) Recording: 512-channel (bandwidth: 1024 Mbps) Outgoing: 512-channel (bandwidth: 1024 Mbps) Playback: 32-channel (bandwidth: 64 Mbps)
Video Direct Storage (International Protocol)	Incoming: 512-channel (bandwidth: 1024 Mbps) Recording: 512-channel (bandwidth: 1024 Mbps) Outgoing: 512-channel (bandwidth: 1024 Mbps) Playback: 32-channel (bandwidth: 64 Mbps)
Picture Direct Storage	Incoming: 250-channel (550 KB/picture) Recording: 250-channel (550 KB/picture) Outgoing: 250-channel (550 KB/picture)
Disk Group	Yes
iSCSI	Supports client and Server
Network Disk	Supports client
RAID	RAID 0/1/5/6/10/50/60; (with enterprise-grade HDD)
Record Management	Supports record control (continuous, event-based, scheduled, scheduled & event-based).
Storage Pool	Yes

IPSAN

IPSAN Performance	360-channel × 2 Mbps video stream writing and 24-channel × 2 Mbps video playback (I/O size of VMS is 64 KB)
-------------------	--------------------------------------------------------------------------------------------------------------

Alarm

General Alarm	Motion detect; tampering; IPC external alarm
Anomaly Alarm	IPC offline alarm; storage error; HDD full; video frame loss; SSD exception; IP conflict; MAC conflict; login lock; fan malfunction; no HDD; network security exception; power exception; disk health exception; RAID exception; storage pool exception; temperature alarm; share service
Alarm Linkage	Record; snapshot (full image); alarm uploading; remote device alarm output; camera audio; buzzer; log; preset; email, smart tracking and warning light. Disarming alarm linkage action by period or one-click sync disarm config with channels

Port



HDD Interface	24 slots, SATA; SAS Max.20 TB/HDD hot swapping CMR support enterprise-grade HDD
eSATA	1 × eSATA/controller
SAS	1 × SAS (up to 12 Gbps)/controller
RS-232	1 × DB9 /controller
USB	2 × USB3.0 and 2 × USB2.0/controller

Dimensions (mm [inch])

HDMI	1 x HDMI/controller, only for debug
Network Port	1 x 1-GbE management port/controller; 4 x 1-GbE LAN ports/controller
Power	1+1 redundant power
Network Port Extension	4 x 1-GbE LAN ports/controller (optional) 2x10-GbE optical fiber ports/controller (optional)

General

Power Supply	100–127 VAC/200–240 VAC, 50/60 Hz, 5 A/2.5 A
Power Consumption	<120 W (without HDD, idling) <500 W (all HDDs connected)
Fan	Intelligent speed regulation fan
Net Weight	29 kg (63.93 lb)
Gross Weight	44 kg (97.00 lb)
Product Dimensions	Chassis: 446 mm × 175mm × 736.5 mm (17.56" × 6.89" × 29.00") (W × L × H) Max. size: 482.6 mm (with hanger) × 175 mm × 736.5 mm (19.00" × 6.89" × 29.00") (W × L × H) Height: 4U
Packaging Dimensions	With packaging: 687 mm × 962 mm × 526 mm (27.00" × 37.87" × 20.70") (W × L × H)
Operating Temperature	0 °C to 45 °C (+32 °F to +113 °F)
Operating Humidity	10%–80% (RH), non-condensing
Operating Altitude	≤5000 m (16404.20 ft)
Installation	Standard 19 inch rack
Certifications	CE: CE-LVD: EN 60950-1/IEC 60950-1 CE-EMC: EN 61000-3-2, EN 61000-3-3, EN 55032, EN 50130, EN 55024 FCC: Part 15 Subpart B

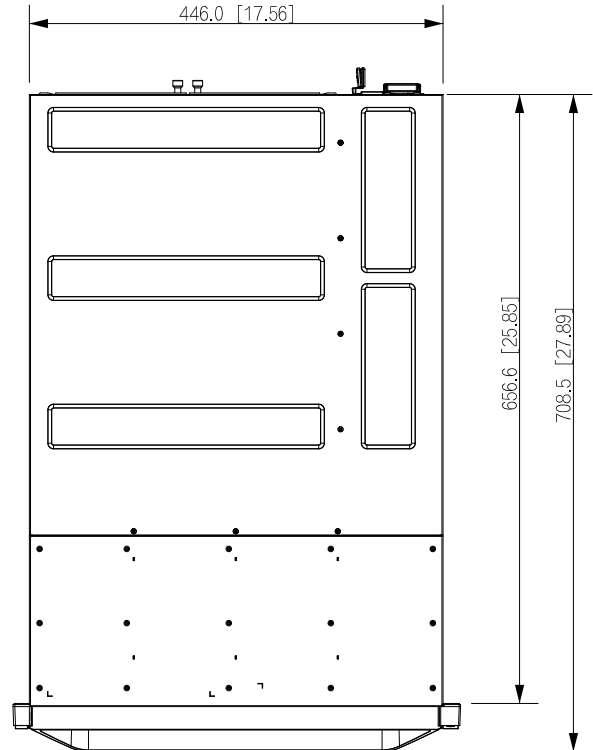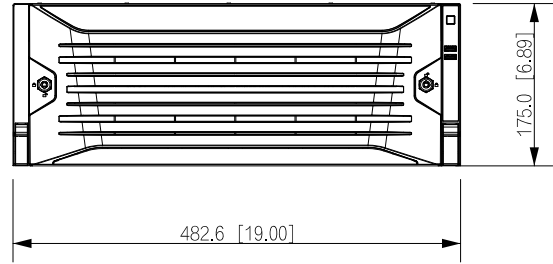

Ordering Information

Type	Model	Description
24-bay EVS	DHI-EVS7124D-V2	24-bay Embedded Video Storage